

# Protecting People and Property




1-800-868-5438 • 724-446-2000 • FAX: 724-446-0988

email: sales@herwin.biz www.herwin.biz





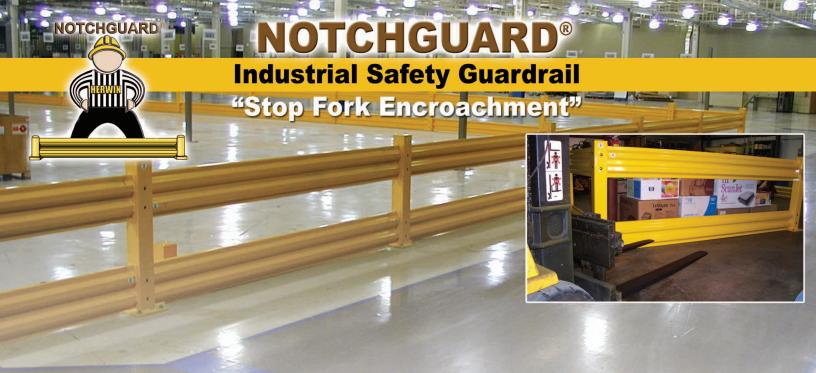

Stop fork encroachment with **NOTCHGUARD®** industrial guardrail. This unique industrial safety rail helps prevent accidental damage to products, controls and materials stored in defined storage and holding areas.

Standard industrial guardrail is designed like road guide rail. The road safety rail is spaced at bumper and fender height to accommodate cars and trucks. **NOTCHGUARD®** bottom rail is installed to prevent the forks attached to a lift truck from protruding through the rail and causing product damage. Standard forklift industry safety guidelines say the forklift operator should travel with the forks in the lowest possible position. Operators conforming to these guidelines travel with the forks 6" to 8" off the ground.

**NOTCHGUARD**® barriers help prevent these forks from encroaching product stored on the other side of the rail. **NOTCHGUARD**® safety rail is easy to install with common

tools such as wrenches, sockets and hammer drill. All standard fasteners are included, even the floor anchors and simple installation instructions are included with each order.

**NOTCHGUARD®** uses the sturdiest posts in the industry. Each post is manufactured from 5" x 5" square tubular metal welded to a 10" x 10" baseplate. Each rail is designed to assure structural stiffness to meet the 10,000 lb. at 4 mph breakthrough rating when installed at proper concrete depth.

All rails and posts have a safety yellow powder coat finish.

#### **AVAILABLE SIZES OF**


### **NOTCHGUARD®** GUARDRAIL

1101011111		
Model #	<u>Size</u>	
NG-10R	10 ft. Rail	
NG-9R	9 ft. Rail	
NG-8R	8 ft. Rail	
NG-7R	7 ft. Rail	
NG-6R	6 ft. Rail	
NG-5R	5 ft. Rail	
NG-4R	4 ft. Rail	
NG-3R	3 ft. Rail	
NG-2R	2 ft. Rail	
Nominal rail length dimension is		

Nominal rail length dimension is from center of post to center of post.

#### AVAILABLE SIZES AND CONFIGURATIONS OF **NOTCHGUARD®** POSTS

Model # GS-SRP	Size/Description 5" x 5" Single Post, 18" high, 12" rail height
GS-DRP	5" x 5" Double Post, 44" high, 42" rail height
GS-LOB	Lift out brackets (Pair)



All rails and posts have a safety yellow powder coat finish.



Download a
worksheet from
our web-site and
our staff will
assist you in the
layout of your
application.



www.notchguard.com



**GUARDSMITH**® industrial guardrail is designed to withstand 10,000 lb. force at a 4 mph breakthrough rating when installed at the proper concrete depth.

**GUARDSMITH**® guardrail uses external mounting fasteners that pass completely through the 5" x 5" post and rail bracket to assure maximum structural strength and integrity.

**GUARDSMITH**\* guardrail is easy to install with common tools. All standard fasteners and floor anchors are included with each order.

**GUARDSMITH**® can tailor fit your application with single or double guardrail as well as post protectors and bollards.

AVAILABLE SIZES OF	
<b>GUARDSMITH®</b> GUARDRAIL	
Model #	<u>Size</u>
GS-10R	10 ft. Rail
GS-9R	9 ft. Rail
GS-8R	8 ft. Rail
GS-7R	7 ft. Rail
GS-6R	6 ft. Rail
GS-5R	5 ft. Rail
GS-4R	4 ft. Rail
GS-3R	3 ft. Rail

AVAILABLE CIZES OF

Nominal rail length dimension is from center of post to center of post.

2 ft. Rail


GS-2R

## AVAILABLE SIZES AND CONFIGURATIONS OF **GUARDSMITH®** POSTS

Model # GS-SRP	Size/Description 5" x 5" Single Post,
	18" high, 17" rail height
GS-DRP	5" x 5" Double Post, 44" high, 42" rail height

44" high, 42" rail heigh

GS-LOB Lift out brackets (Pair)



All rails and posts have a safety yellow powder coat finish.



Download a worksheet from our web-site and our staff will assist you in the layout of your application.



©2012 Herwin, Inc. All rights reserved. Specifications subject to change.

www.guardsmith.com



**EXTERIORGUARD®** industrial guardrail is designed to protect exterior walls of buildings, walkways, electrical equipment, valving, storage tanks and loading docks in an outdoor environment.

**EXTERIORGUARD®** system provides a highly visible yellow safety barrier as well as a physical barrier.

**EXTERIORGUARD®** includes external, galvanized mounting fasteners that pass completely through the 5"x5" post and

rail bracket to ensure maximum structural strength and integrity.

**EXTERIORGUARD®** is rated at 10,000 lb. at a 4 mph breakthrough when the included galvanized floor anchors are installed at the proper concrete depth.

**EXTERIORGUARD®** has a special powder coating that has successfully passed rigorous salt spray testing to ensure a corrosion resistant product.

AVAILABLE SIZES OF EXTERIORGUARD®
OUTDOOR GUARDRAIL

Model #	<u>Size</u>
EG-8R	8 ft. Rail
EG-7R	7 ft. Rail
EG-6R	6 ft. Rail
EG-5R	5 ft. Rail
EG-4R	4 ft. Rail
EG-3R	3 ft. Rail
EG-2R	2 ft. Rail

Nominal rail length dimension is from center of post to center of post.

#### **AVAILABLE EXTERIORGUARD® POST**

Model # Size/Description

EG-DRPE 5" x 5" Double Post,

44" high, 42" rail height





All rails and posts have a safety yellow powder coat finish.



Exteriorguard® uses a high tech safety yellow powder coating for each rail and post. This coating has been successfully tested in a 2000 hour salt spray test conforming to ASTM B117.

Download a
worksheet
from our
web-site and
our staff will
assist you in
the layout of
your
application.



www.exteriorguard.com